


[Reading the display]

[Time/calendar setting mode]

[Regular timekeeping]

[Stopwatch display]

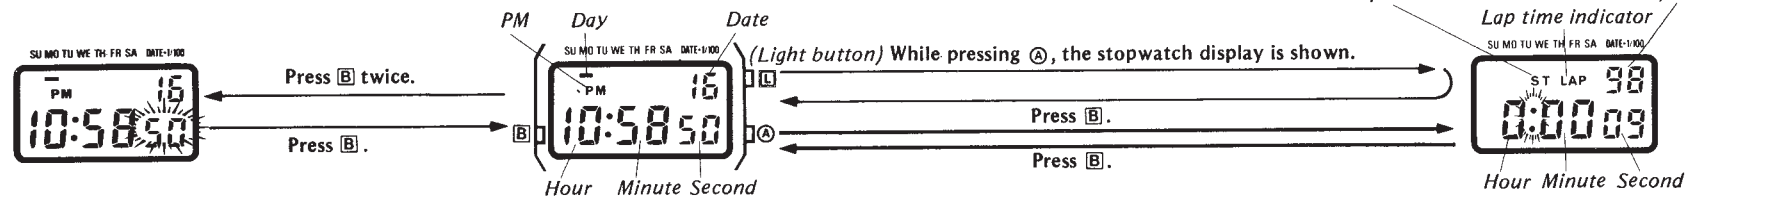

[Operating the stopwatch]

(a) Net time measurement

(Start)
Press **[A]** to start.

(Stop)

Press **[A]** to stop.
(Time loss)

(Re-start)

Press **[A]** to re-start.

(Stop)

Press **[A]** to stop.

(Reset)

Press **[B]** to reset.

(b) Lap time measurement

(Start)
Press **[A]** to start.

(Lap)
Press **[B]** to take lap time.

(Lap release)

Press **[B]** to release lap time.

(Stop)

Press **[A]** to stop.

(Reset)

Press to **[B]** reset.

(c) 1st-2nd place times

(Start)
Press **[A]** to start.

(Lap)
Press **[B]** when the first runner finishes.

(Stop)
Press **[A]** when the second runner finishes.

(Lap release)
Record the time of the first runner and press **[B]**.


(Reset)

Record the time of the second runner and press **[B]**.

(Working range)

The stopwatch display is limited to 11 hours 59 minutes 59.99 seconds. Thereafter it can be reset and started again.

[Setting time and calendar]

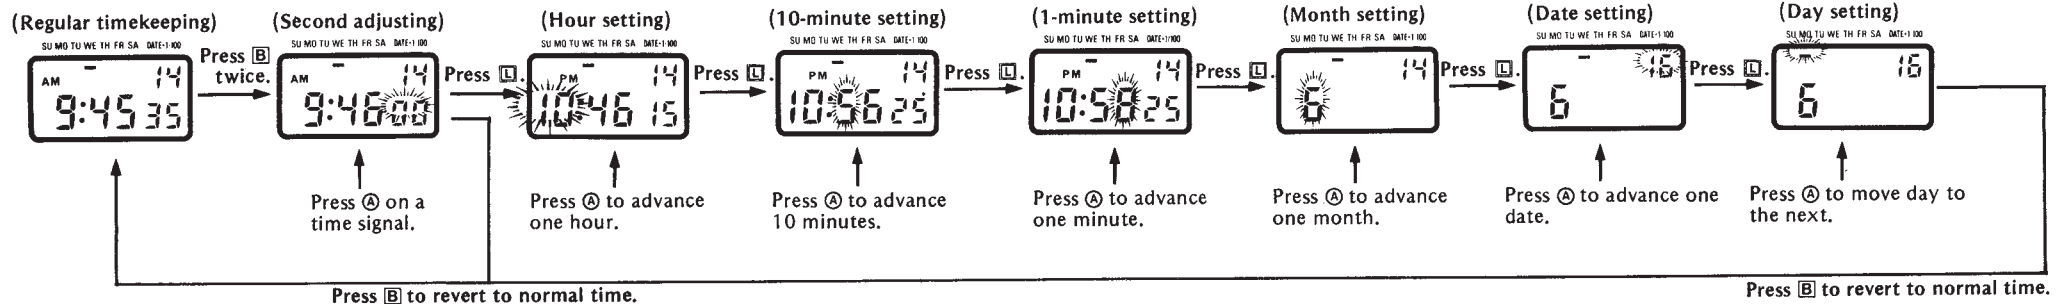

(Independent correction)

Correction of any digit, if not required, can be skipped by pressing the **[B]** button repeatedly.

(Reversion to normal time display)

The watch reverts to the normal time display if the **[B]** button is pressed, regardless of the digit setting mode.

(Auto-retrieve function)

Any setting display will automatically return to the regular timekeeping mode in 1 or 2 minutes.